


High Definition CVI Vandal Resistant IR Camera

Model: HA125-IRW



Features:

- Day/Night Vandal Proof IR Camera
- 2.1 Megapixel CMOS
- Smart IR LEDs, 30M IR Distance
- Built-in IR Cut filter
- Weather Resistance: IP66
- Digital Noise Reduction (DNR)
- Auto White Balance (AWB)
- Lens: 3.6,6,8 & 12 mm Fixed Lens
- Support 25/30fps @1080P

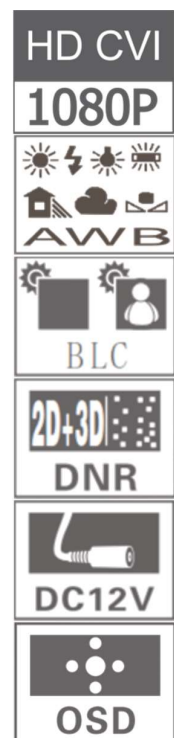

Specification:

Operational	
Video Standard	NTSC / PAL
Image Sensor	2.1 Megapixel CMOS
Effective Pixels	1920(H) x 1080(V)
Illumination	0 LUX, operates in total darkness
Video Output	CVI BNC, CVBS terminal
Lens Mount	Fixed
Lens	6mm Fixed (3.6, 6, 8 & 12mm Optional)
Sync System	12 VDC: Internal
S/N Ratio	More than 52 dB (AGC off)
Electronic Shutter	1/60 – 1/120,000 sec (NTSC) 1/50 – 1/120,000 sec (PAL)
Gain Control	Automatic
White Balance	Automatic
BLC	Automatic
IR LED	Smart IR LEDs
IR Distance	30 Meter
DNR	Automatic
WDR	Digital / Automatic
Electrical	
Input Voltage	12V DC
Input Range	±25%
Surge Suppression	1.5 KW transient
Power Consumption	DC12V±1V(Max 4W, Max 7W when IR cut switch)
Mechanical	
Dimensions	Φ70mm×165mm
Weight	550 grams
Construction	Brushed and anodized aluminum with sunshield
Connector	Video Output: BNC Connector Power Input: Tinned Leads
Environmental	
Temperature	-10oC ~ +55oC
Relative Humidity	0% to 85%, non-condensing
Rating	IP66
Regulatory	
Emissions	FCC: Part 15, Class B CE: EN 55013
Immunity	CE: EN50130-4
Safety	EU: 73/23/EEC LVD

Note: Design & Specification are subject to change without prior notice.

VIDEOLINEUSA Security Systems, Inc.

Head Office : 601, Woolim e-BizII,
184-1 Guru Dong, Guru-gu,
Seoul 152-050, Korea
Tel # : +82-2-8913231
Fax # : +82-2-856-8732
Email : info@videolineusa.com

